


Mini GPS Locator

Model: TK-1315LA

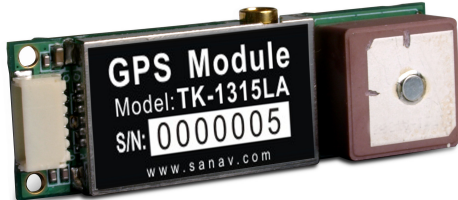

Specifications

PHYSICAL CONSTRUCTION	
Dimension	L42.5 x W14.0 x H7.1mm
Weight	<8 gram
Receiving frequency	1575.42MHZ; C/A code
Mounting	6-pin connectors with 1.0mm pitch
Construction	Full EMI shielding
ENVIRONMENTAL CONDITIONS	
Temperature	Operating: -30 ~ +85 °C
	Storage: -40 ~ +85 °C
COMMUNICATION	
Protocol	NMEA0183 V3.00, RTCM
Signal level	UART @ 3.3V
INTERFACE CAPABILITY	
Output Sentences	Standard :GGA, RMC, GSV, GSA,VTG
	Option :GLL, ZDA
External Antenna	MCX Edge mount
PERFORMANCE	
Sensitivity	-159dbm
Receiver architecture	20 parallel channels
Start-up time	<5 sec. typical (hot start)
	45 sec. typical (warm start)
	45sec. typical (cold start)
Position accuracy	Without aid 2.9 m CEP
Velocity	100m/s (Maximum)
Altitude	50 km (Maximum)
Update Rate	1 Hz
Power Supply	3.3V +- 5%
Current Consumption	Acquisition: 53mA, Tracking: 53mA
Baud Rate	9600 bps (default) & 4800/9600/38400/57600/115200 bps are adjustable

©2008 San Jose Technology, Inc. All specifications subject to change without notice.